



A BOLTORQ Quick Coupler is a device used to rapidly connect and disconnect hydraulic or pneumatic lines in various applications. It typically consists of two main components: a male end and a female end, each equipped with mechanisms to facilitate quick connection and disconnection.



- 3/8' NPT High flow couplers.
- It is standard component on most BOLTORQ Cylinders.
- Featuring ' Push-to-connect ' operation.
- 1/4" Regular coupler.



C Series Quick Coupler Dimension

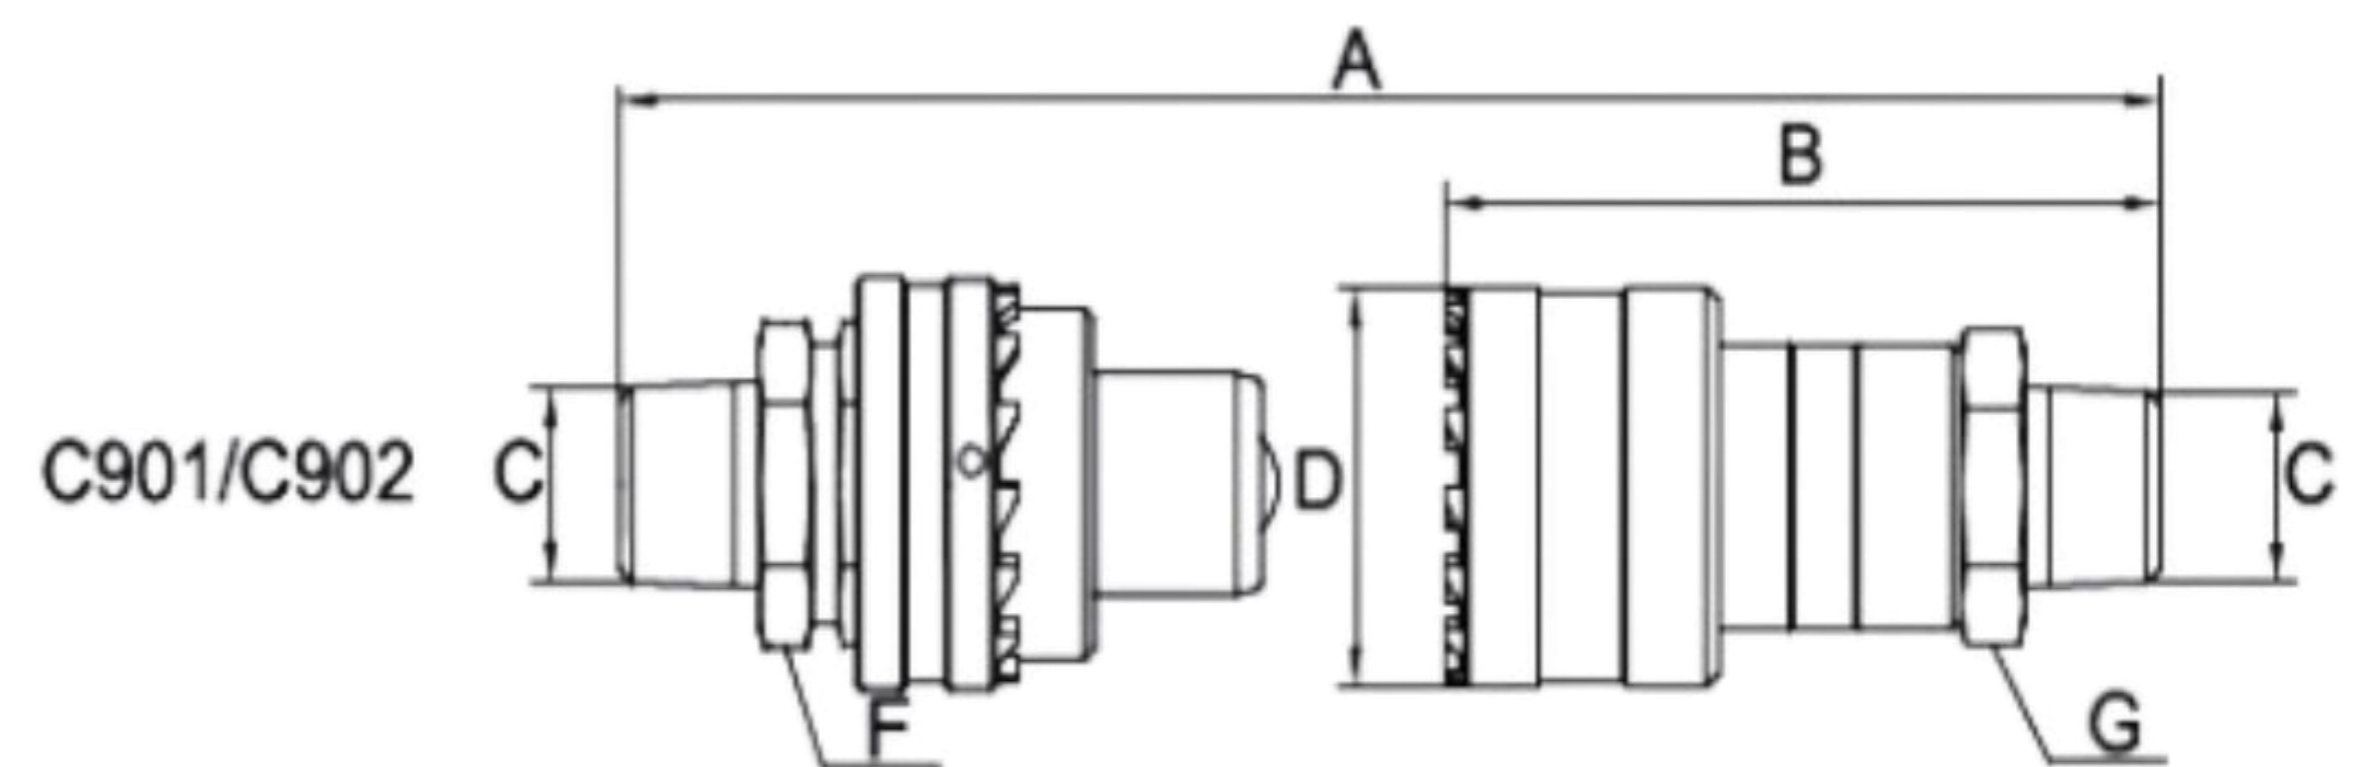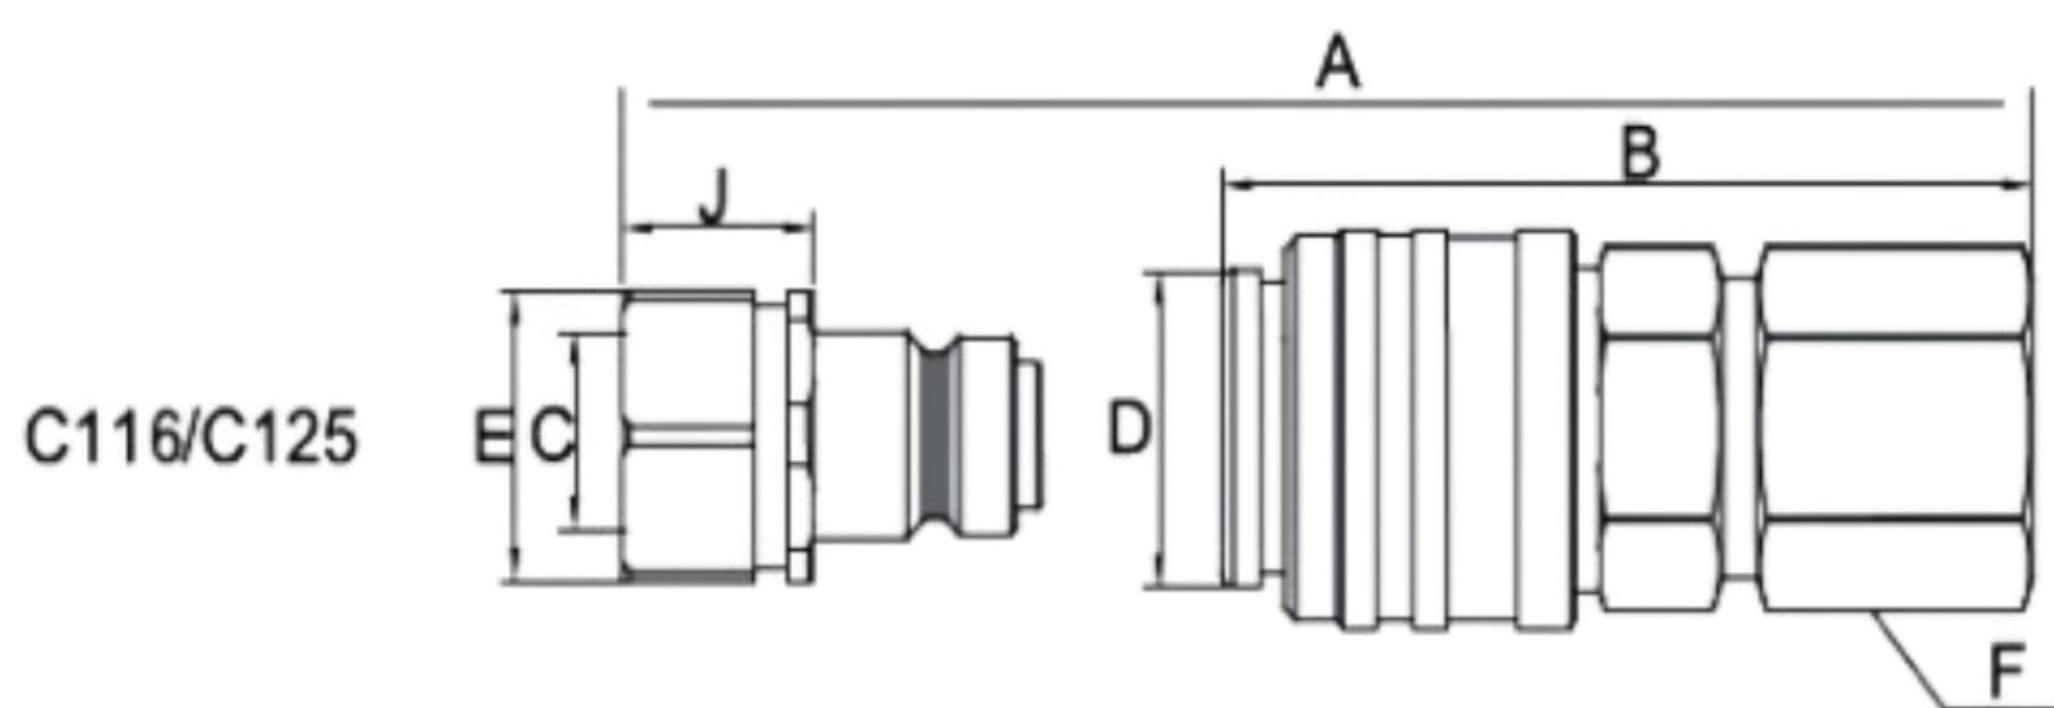

Model & Photograph	Max Operating Pressure	Male Half	Female Half	Connecting	Dimension								
					A	B	C	D	E	F	G	H	
C901 	70MPa	C9014	C9013	Spiral Lock	97	61	1/4" NPT	29		22	22		
					97	61	1/4" NPT	29		22	22		
C902 	70MPa	C9022	C9021	Spiral Lock	108	71	3/8" NPT	35		24	24		
					108	71	3/8" NPT	35		24	24		
C116 	150MPa	C1162	C1161	Card Set	81		1/4" BSP		27.5			18.5	
					81	61.5	1/4" BSP	28		24			
C125 	200MPa	C1252	C1251	Card Set	82		1/4" BSP		27.5			17.7	
					82	64.5	1/4" BSP	30		24			